



Release Notation		
Date	Revision	Comments
2006.3	1.0	For SM324BB and First Release
2006.3	1.1	1,add U12 and SB3 for LVD.

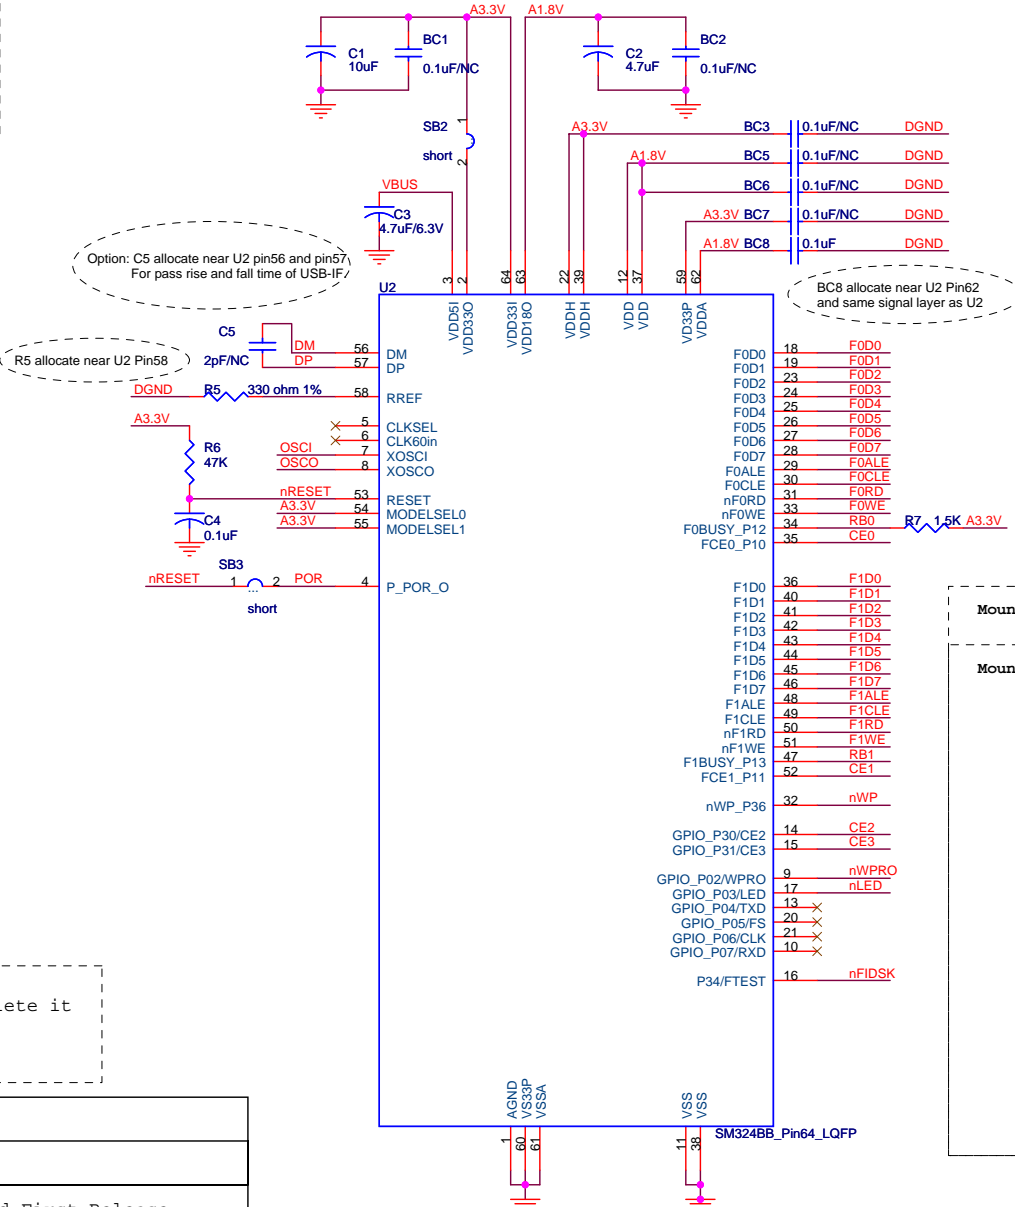


HARDWARE PRETEST enable select for manufacture to erase flash wrong data

SB1 short for "pretest mode".(normally, SB1 is open)
Provides the 5V power source or directly plug in USB PORT.
This time led to the idling speed glitters, After waits for several seconds, LED will glitter can change quickly, This expressed "PRETEST" completed



"1CE pin"&"2 CE pin"&"4 CE pin" Flash setup





	R1	R2	R3	R4
1CE	V			
2CE			V	V
4CE(MLC)		V	V	
4CE(SLC)			V	
Internal Inter leave		V	V	

Note: The Internal Inter leave for K9K2G/K9K4G/K9K8G.

Mount 2 pcs Flash

Mount 1 pcs Flash

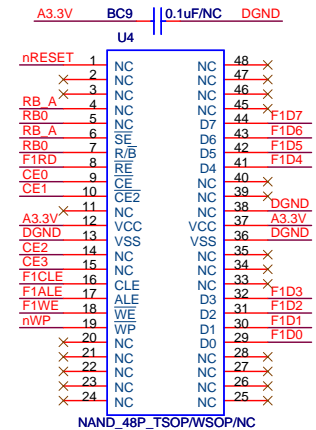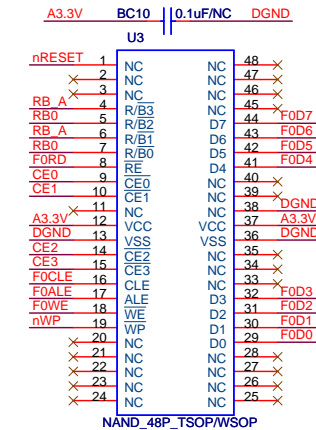

Silicon Motion, INC.

Title SM324 DEMOBOARD

Size B

Document Number

SM324BB_2CE_DEMO_V11.DSN

Rev 1.0

Date: Thursday, March 09, 2006

Sheet 1 of 1